




- Altezza massima 7m
- Palo telescopico in acciaio inox
- Interruttori On/Off per ogni singolo proiettore
- Sollevamento mediante argano manuale dotato di freno automatico con portata massima 500Kg e sistema di funi in acciaio inox 133 fili
- 4 stabilizzatori regolabili in altezza
- Ruote e maniglie per la movimentazione della torre
- Spina d'ingresso rete 220V 16A IP 67
- Presa d'uscita rete 220V-16A IP67
- Cavo spiralato per l'alimentazione dei fari
- Apposite tasche e ganci per il sollevamento dell'intera struttura con muletto o gru
- 4 proiettori agli ioduri metallici da 400W
- Lampada incorporata
- Struttura alimentabile da rete fissa o gruppo elettrogeno
- Stabilità al vento certificata sino a 80 Km/h

- Maximim height 7m
- Telescopic stainless steel mast
- On/Off switches one for each lamp
- Rising system with manual winch with automatic brake, maximum load capacity 500Kg and system of stainless steel ropes 133 wires.
- 4 rugged stabilizers adjustable in height
- Handles and wheels for the actions of the tower
- 220V - 16A - IP67 inlet plug
- 220V - 16A - IP67 outlet socket
- Electrical coiled cable complete with housing
- Pockets and eyelets for lifting the structure with crane or forklift
- 4 metal halide floodlights 400W each
- Lamps complete of bulb
- Possibility to ignite the lamps from main or generating set
- Certified wind stability until 80 Km/h




# LINKTOWER 7m


Torre faro manuale - Manual lighting tower

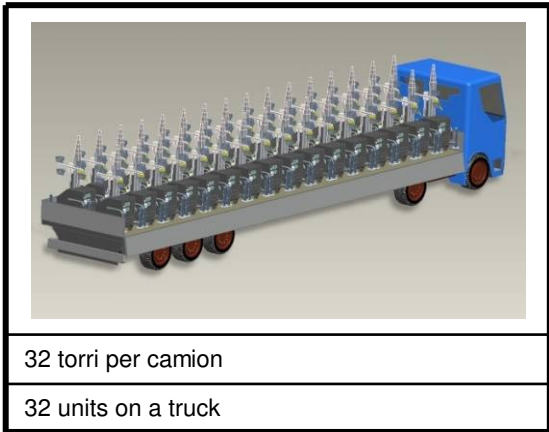

32 torri per camion  
32 units on a truck

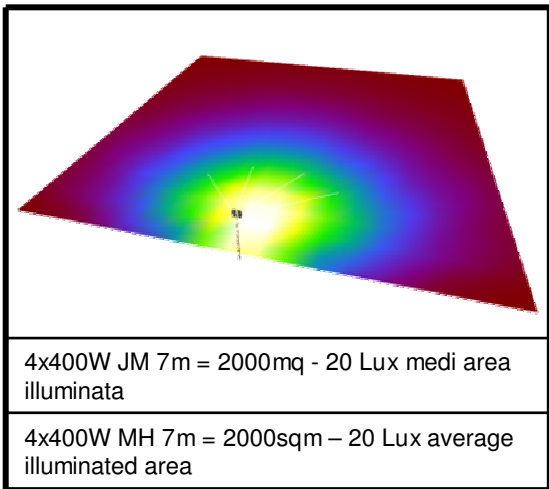

4x400W JM 7m = 2000mq - 20 Lux medi area illuminata  
4x400W MH 7m = 2000sqm - 20 Lux average illuminated area

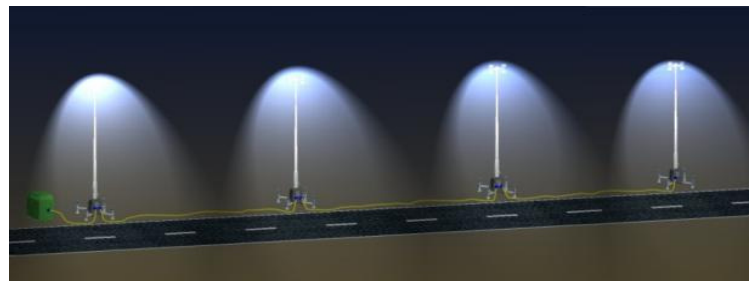

4 unità collegabili in serie con un'unica fonte di energia  
4 units linkable in series with only one power source

### Dimensioni e Peso – Dimensions and weight

Dim. mini. (cm)	120x80x233
Dim. maxi. (cm)	180x140x700
Peso/Weight (Kg)	244

### Area illuminata - Illuminated area

2000m<sup>2</sup>

### Caratteristiche – Features

Rotazione/Rotation	NO
Proiettori/Floodlights	Joduri / metal halide
Lampade/Lamps	4x400W
Sezioni/ Sections	5
Optionals: rotazione manuale a 360° / manual rotation at 360°	

Tower Light s.r.l.  
Via Stazione 3 bis  
27030 Villanova d'Ardenghi (PV) - Italy  
Tel. +39 0382.567.011 - Fax +39 0382.400.247  
web: <http://www.towerlight.it>  
e-mail: [info@towerlight.it](mailto:info@towerlight.it)